



With Brooks Rewards, members get exclusive product offers every month.

Quality Coupled With Value!


A step up from standard **Rack & Reel Fire Hose**, and a great value, **FireTech's™ SINGLE JACKET FIRE HOSE** has a proof test pressure of 500 psi and a service test of 250 psi. It's FM approved and made of 100% polyester rubber-lined material for extra strength and flexibility. Imported.

NOTE: Recommended for industrial fire protection.



FTSJ50NST

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
FTSJ50NST or NPSH	50' x 1 1/2" Brass	1 13/16"	15 lbs
FTSJ50ANST	50' x 1 1/2" Alum	1 13/16"	13 lbs
FTSJ75NST	75' x 1 1/2" Brass	1 13/16"	20 lbs
FTSJ75ANST	75' x 1 1/2" Alum	1 13/16"	18 lbs
FTSJ100NST or NPSH	100' x 1 1/2" Brass	1 13/16"	27 lbs
FTSJ100ANST	100' x 1 1/2" Alum	1 13/16"	25 lbs
FTSJ2550NST	50' x 2 1/2" Brass	2 13/16"	27 lbs
FTSJ2550ANST	50' x 2 1/2" Alum	2 13/16"	25 lbs
FTSJ25100NST	100' x 2 1/2" Brass	2 13/16"	51 lbs

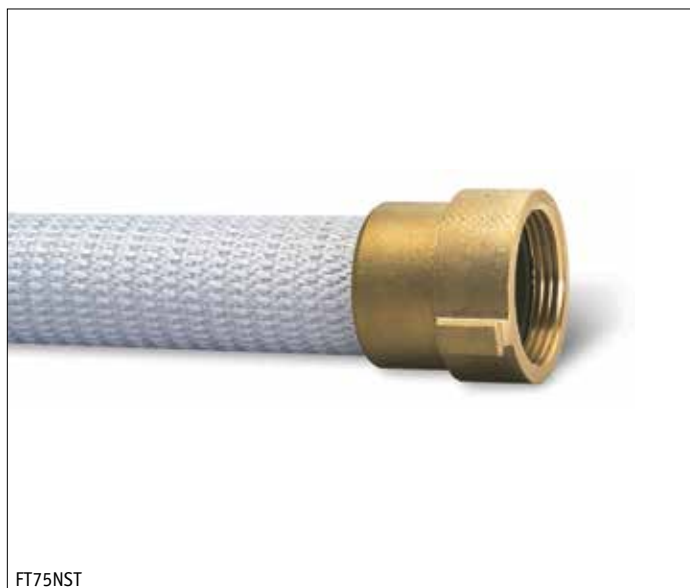

FT75NST

FIRE HOSE

For emergency use only, **FireTech™ RACK & REEL FIRE HOSE** is fully lined, FM approved, and a great value. It has a proof test pressure of 500 psi, service test of 250 psi, and comes folded for easy installation on pin racks. Brass couplings only. Imported.

NOTE: Not intended for purposes of wash down!

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
FT50NST or NPSH	50' x 1 1/2" Brass	1 11/16"	7 lbs
FT75NST or NPSH	75' x 1 1/2" Brass	1 11/16"	9 lbs
FT100NST or NPSH	100' x 1 1/2" Brass	1 11/16"	12 lbs

For emergency use only, this **RACK & REEL FIRE HOSE** is fully lined and FM approved. It has a proof test pressure of 500 psi, service test of 250 psi, and comes folded for easy installation on pin racks. Brass couplings only.

NOTE: Not intended for purposes of wash down!

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
50NST or NPSH	50' x 1 1/2" Brass	1 11/16"	7 lbs
75NST or NPSH	75' x 1 1/2" Brass	1 11/16"	9 lbs
100NST or NPSH	100' x 1 1/2" Brass	1 11/16"	12 lbs



SJ50NST

A step up from standard **Rack & Reel Fire Hose**, our **SINGLE JACKET FIRE HOSE** has a proof test pressure of 500 psi and a service test of 250 psi. It's FM approved and made of 100% polyester rubber-lined material for extra strength and flexibility.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
SJ50NST or NPSH	50' x 1 1/2" Brass	1 13/16"	15 lbs
SJ50ANST	50' x 1 1/2" Alum	1 13/16"	13 lbs
SJ75NST or NPSH	75' x 1 1/2" Brass	1 13/16"	20 lbs
SJ75ANST	75' x 1 1/2" Alum	1 13/16"	18 lbs
SJ100NST or NPSH	100' x 1 1/2" Brass	1 13/16"	27 lbs
SJ100ANST	100' x 1 1/2" Alum	1 13/16"	25 lbs
SJ2550NST or NPSH	50' x 2 1/2" Brass	2 13/16"	27 lbs
SJ2550ANST	50' x 2 1/2" Alum	2 13/16"	25 lbs
SJ25100NST	100' x 2 1/2" Brass	2 13/16"	51 lbs



When you require an extra measure of certainty, our **UL LABELED SINGLE JACKET FIRE HOSE** fits the bill. Pre-tested under UL supervision, this premium fire hose features a proof test pressure of 500 psi and a service test of 250 psi. And in addition to fully rubber lined 100% polyester construction, every length carries the **UL®** mark, so you can be sure it's genuine. Brass couplings only.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED	EACH
SJ50ULNST	50' x 1 1/2" Brass	1 13/16"	15 lbs	
SJ75ULNST	75' x 1 1/2" Brass	1 13/16"	20 lbs	
SJ100ULNST	100' x 1 1/2" Brass	1 13/16"	27 lbs	
SJ2550ULNST	50' x 2 1/2" Brass	2 13/16"	27 lbs	



SJ50ULNST

For added durability under pressure, it's hard to beat our **DOUBLE JACKET FIRE HOSE**. Each length features two jackets of 100% polyester rubber-lined material for added protection against cuts, rips, and abrasion. It has a proof test pressure of 800 psi and a service test of 400 psi. Meets NFPA 1961.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED	EACH
DJ50NST or NPSH	50' x 1 1/2" Brass	1 15/16"	20 lbs	
DJ50ANST	50' x 1 1/2" Alum	1 15/16"	18 lbs	
DJ100NST	100' x 1 1/2" Brass	1 15/16"	35 lbs	
DJ100ANST	100' x 1 1/2" Alum	1 15/16"	32 lbs	
DJ2550NST	50' x 2 1/2" Brass	3"	37 lbs	
DJ2550ANST	50' x 2 1/2" Alum	3"	34 lbs	



DJ50NST

For even more durability under pressure, our **YELLOW COATED FIRE HOSE** is a great choice. Constructed to the same specifications as our standard **Double Jacket Hose**, every section of **Coated Hose** is independently and completely impregnated with an abrasion-resistant, water-repellent polymer for outstanding performance under tough conditions. Aluminum couplings only.

NOTE: Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED	EACH
DJ50YHANST	50' x 1 1/2" Alum	1 15/16"	21 lbs	
DJ17550YHANST	50' x 1 3/4" Alum	2 1/8"	25 lbs	
DJ2550YHANST	50' x 2 1/2" Alum	3"	39 lbs	



DJ50YHANST

The ultimate hard wearing, hard performer, our **RUBBER COVERED FIRE HOSE** is the choice of professionals' nationwide. That's because it's abrasion-resistant, heat-free nitrite synthetic one-piece cover and liner is impervious to water, oil, gas, and most chemicals. It has a proof test pressure of 500 psi and a service test of 250 psi. Plus it's lightweight, virtually kink-resistant for easy handling, and never needs drying. Aluminum couplings only. Meets NFPA 1961.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED	EACH
RCH50ANST	50' x 1 1/2" Alum	1 3/4"	11 1/2 lbs	
RCH100ANST	100' x 1 1/2" Alum	1 3/4"	22 lbs	
RCH2550ANST	50' x 2 1/2" Alum	3"	24 lbs	



RCH50ANST

NOTE: For Additional Hose Options, Please Contact the Sales Department at 800-826-3473



3 FIRE HOSE, NOZZLES, BRASS, & HOSE VALVES



FH150ANST

This lightweight **FORESTRY HOSE** meets the USDA-US Forest Service Specification. Proof test pressure is 500 psi and service test is 250 psi. Aluminum couplings only.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED	EACH
FH150ANST	50' x 1" Alum	1 ¹ / ₄ "	7 lbs	
FH1100ANST	100' x 1" Alum	1 ¹ / ₄ "	11 lbs	
HS01	Hose Tote Strap System			



HS01

Designed for structural, vehicle, grass, and forestry firefighting, our **BOOSTER HOSE** has an outer jacket constructed from a specially compounded red neoprene (resists abrasion, ultraviolet light, ozone, and most petrochemicals) with two braids of high-tensile rayon yarn. The tube is constructed of smooth black SBR rubber for added performance. Hose has a proof test pressure of 800 psi and a service test of 400 psi. Aluminum couplings only. Meets NFPA 1961.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED	EACH
BH150ANST	50' x 1" Alum	1 ⁹ / ₁₆ "	31 lbs	
BH1100ANST	100' x 1" Alum	1 ⁹ / ₁₆ "	60 lbs	



BH150ANST

FIRE HOSE COUPLINGS, RINGS, AND GASKETS

RACK & REEL HOSE COUPLINGS are made of cast brass or aluminum and come with rings and gaskets.

P/N	DESCRIPTION	BOWL SIZE
RHCNST	1 ¹ / ₂ " NST Brass	1 ¹¹ / ₁₆ "
ARHCNST	1 ¹ / ₂ " NST Alum	1 ¹¹ / ₁₆ "
RHTG	Tail Gasket	1 ¹¹ / ₁₆ "
SJSG15	1 ¹ / ₂ " Swivel Hose Gasket	
ER15	1 ¹ / ₂ " x 7/8" Expansion Ring	



RHCNST



GASKETS

SINGLE JACKET HOSE COUPLINGS are made of cast brass or aluminum and come with rings and gaskets.

P/N	DESCRIPTION	BOWL SIZE
SJC15NST	1 ¹ / ₂ " NST Brass	1 ¹³ / ₁₆ "
SJC15NPSHD	1 ¹ / ₂ " NPSH Brass	1 ¹³ / ₁₆ "
ASJC15NST	1 ¹ / ₂ " NST Alum	1 ¹³ / ₁₆ "
ASJC15NPSHD	1 ¹ / ₂ " NPSH Alum	1 ¹³ / ₁₆ "
ASJC25NSTD	2 ¹ / ₂ " NST Alum	2 ¹³ / ₁₆ "
SJC25NST	2 ¹ / ₂ " NST Brass	2 ¹³ / ₁₆ "
SJTG15	Tail Gasket	1 ¹³ / ₁₆ "
SJTG25	Tail Gasket	2 ¹³ / ₁₆ "
SJSG15	1 ¹ / ₂ " Swivel Hose Gasket	
SJSG25	2 ¹ / ₂ " Swivel Hose Gasket	
SER15	1 ¹ / ₂ " x 1 ¹ / ₄ " Expansion Ring	
SER25	2 ⁷ / ₁₆ " x 1 ¹ / ₄ " Expansion Ring	



SJC15NST



SER15, ER15

DOUBLE JACKET HOSE COUPLINGS are made of cast brass or aluminum and come with rings and gaskets.

P/N	DESCRIPTION	BOWL SIZE
DJCNSTD	1 ¹ / ₂ " NST Brass	1 ¹⁵ / ₁₆ "
DJCNPSHD	1 ¹ / ₂ " NPSH Brass	1 ¹⁵ / ₁₆ "
ADJCNSTD	1 ¹ / ₂ " NST Alum	1 ¹⁵ / ₁₆ "
DJC25NSTD	2 ¹ / ₂ " NST Brass	3"
ADJC25NSTD	2 ¹ / ₂ " NST Alum	3"
DJTG15	Tail Gasket	1 ¹⁵ / ₁₆ "
DJTG25	Tail Gasket	3"
SER15	1 ¹ / ₂ " x 1 ¹ / ₄ " Expansion Ring	
DER25	2 ⁷ / ₁₆ " x 1 ¹ / ₂ " Expansion Ring	
SJSG15	1 ¹ / ₂ " Swivel Hose Gasket	
SJSG25	2 ¹ / ₂ " Swivel Hose Gasket	



DJCNSTD



DER25



When you need to test hose, test it fast with one of our **SINGLE** or **TRIPLE ELECTRIC HOSE TESTERS**. Both accommodate 1½" and 2½" fire hoses and can be used in wet conditions with their 120V wash-down electric motors. Quick connect adapters are standard too. Can be used to meet NFPA Hose Testing Guidelines. Hose adapters sold separately, see page 45.

P/N	DESCRIPTION
DDP59462GZ	Single Electric Hose Tester
DDP58589GZ	Triple Electric Hose Tester
DDP58524GZ	Cap, 1½" Hose Tester NST
DDP58526GZ	Cap, 2½" Hose Tester NST
DDP58585GZ	Plug, 1½" Hose Tester NST
DDP58587GZ	Plug, 2½" Hose Tester NST



DDP58589GZ



DDP59462GZ

POLYCARBONATE FIRE HOSE NOZZLES

Brooks' high-impact **POLYCARBONATE NOZZLES** are an economical alternative to the more expensive brass models and come with the same array of spray patterns—straight stream to fog. Ideal for locations where brass theft is a concern.

NOTE: Intended for firefighting use only.

P/N	UL RATING
15NST	UL Listed for Class A:B Fires Only
15IPT	UL Listed for Class A:B Fires Only
E15IPT	UL Listed for Class A:B:C (Electrical) Fires
E15NST	UL Listed for Class A:B:C (Electrical) Fires

P/N	DESCRIPTION
10NST	1" Adjustable Fog/Stream/Shut-Off, 30 gpm, NST
10IPT	1" Adjustable Fog/Stream/Shut-Off, 30 gpm, NPSH
15NST	1½" Adjustable Fog/Stream/Shut-Off, 78 gpm, NST
15IPT	1½" Adjustable Fog/Stream/Shut-Off, 78 gpm, NPSH
E15IPT	1½" Adjustable Fog/Shut-Off Only, 78 gpm, NPSH
E15NST	1½" Adjustable Fog/Shut-Off Only, 78 gpm, NST
25NST	2½" Adjustable Fog/Stream/Shut-Off, 210 gpm, NST
2520NST	2½" Adjustable Fog/Stream/Shut-Off w/ Handles, 150 gpm, NST
B250G	Nozzle Gasket for 2½" Nozzles
GIPT	Nozzle Gasket for 1½" NPSH Nozzles
GNST	Nozzle Gasket for 1½" NST Nozzles
10G	Gasket for 1" NST Nozzles

Rated gallons per minute (gpm) at 100 psi (wide open).



15NST



10NST



25NST



2520NST

BRASS FIRE HOSE NOZZLES

Made just like they were in the old days, these **Underwriter PLAYPIPES** are constructed of cast brass with red Marlin trim and a swivel handle. The discharge end is supplied with **Underwriter's** thread (2³⁄₁₆" ODM x 12 threads per inch) and the whole pipe is 30" long. Inlet: 2½" NST with a standard 1¹⁄₈" discharge tip (1³⁄₄" without tip).

P/N	DESCRIPTION
221	Playpipe

Our **BRASS STRAIGHT STREAM NOZZLE** comes with a ½" discharge at the tip for powerful sprays that reach a long way, making this 1½" x 10" nozzle ideal for industrial wash down. Satin brass finish.

P/N	DESCRIPTION
211N	Straight Stream Nozzle (NST)



221



211N



3 FIRE HOSE, NOZZLES, BRASS, & HOSE VALVES



118I

These industrial-grade **BRASS FOG NOZZLES** are precision machined to perform flawlessly—straight stream through full fog and shutoff. Satin brass finish. UL listed for Class A and B fires and FM approved, except 114N (UL listed only).

P/N DESCRIPTION

- 117N 1 1/2" Adjustable Fog Nozzle, 94 gpm, NST
- 117I 1 1/2" Adjustable Fog Nozzle, 94 gpm, NPSH
- 114N 2 1/2" Adjustable Fog Nozzle, 270 gpm, NST
- 113N 1 1/2" Adjustable Fog Nozzle, 106 gpm, NST
- 113I 1 1/2" Adjustable Fog Nozzle, 106 gpm, NPSH
- 118N 1" Adjustable Fog Nozzle, 26 gpm, NST
- 118I 1" Adjustable Fog Nozzle, 26 gpm, NPSH



114N



113I

Designed specifically for electrical fires (no straight stream), these industrial **BRASS ALL-FOG NOZZLES** are precision machined for optimum performance from shut off to 30° through 90° fog. Satin brass finish. UL listed for Class A, B, and C (Electrical) fires.

P/N DESCRIPTION

- 115N 1 1/2" All-Fog Nozzle, 98 gpm, NST



115N



116N

BRASS PIN RACK NOZZLES are made to clip into any standard hose rack unit, providing easy, economical protection at the business end of the fire hose. Nozzles come standard with variable streams (shut off, straight stream, and fog). Satin brass finish. UL listed for Class A and B fires.

P/N DESCRIPTION

- 116N 1 1/2" Adjustable Rack Fog Nozzle, 60 gpm, NST
- 116I 1 1/2" Adjustable Rack Fog Nozzle, 60 gpm, NPSH

UL rated gallons per minute (gpm) at 100 psi (wide open)

RACKS AND REELS

Brooks semi-automatic **PIN RACKS** offer all the quality and performance you need for a hanging rack and single jacket hose. Each one comes pre-loaded with movable pins and an automatic release mechanism that keeps water out of the hose until the last fold is removed. Red.

NOTE: Pin rack length is measured from center of nipple opening to end of hose clip.



HR4FMUL

P/N	RACK HOSE	SJ HOSE	HOSE DIA	L	W
DMHR4UL	100'	—	1 1/2"	18"	4"
HR4FMUL	100'	—	1 1/2"	17 1/2"	4 1/4"
HR5SJ	—	100'	1 1/2"	22"	4"
HR6FMUL	100'	—	1 1/2"	17 1/2"	4 1/4"

P/N DESCRIPTION

- DMHR4UL Pin Rack for Rack Hose, UL
- HR4FMUL Pin Rack for Rack Hose, UL/FM
- HR5SJ Pin Rack for SJ Hose
- HR6FMUL Pin Rack w/ 2 1/2" Nipple Opening for Rack Hose, UL



FHWB



311N


PIN RACK ACCESSORIES include wall brackets, rack nipples, nozzle clips, and extra pins for supporting and maintaining hose rack assemblies. Use a wall bracket with a F x M valve and a rack nipple with a F x F valve.

P/N DESCRIPTION

- FHWB Wall Bracket for Pin Rack w/ 1 1/2" Opening
- 311I 1 1/2" Rack Nipple, NPT x NPSH
- 311N 1 1/2" Rack Nipple, NPT x NST
- 312N 2 1/2" Rack Nipple, NPT x NST



FOGC



RPIN



BPIN

P/N DESCRIPTION

- FOGC Fog Nozzle Clip for Pin Rack
- RPIN Pin for Badger Powhatan Pin Rack
- BPIN Pin for Brooks & Elkhart Pin Rack




Count on FireTech™ To Support Your Hose Storage Needs

These **FireTech™ HOSE HANGERS** are constructed of aluminum alloy and conveniently accommodate 100' of lined or unlined hose, up to 2½". The top shoulder is spring loaded so that water pressure or a single pull is sufficient to release the hose. It also stores hose close to walls or columns to minimize damage as well as allowing for fewer bends in the hose, prolonging its life. Mounting instructions included.



THH

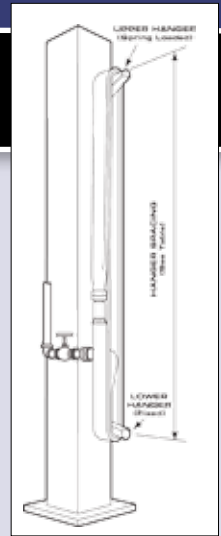

P/N	DESCRIPTION	EACH
THH	Hose Hanger	

Hose Length	Total Loops Of Hose		
	2	3	4
50'	12	8	6
75'		12	9
100'			12

Brooks' steel **ECONOMY HOSE REELS** offer quality and value in a sturdy design. They come with a 16-gauge steel wall bracket that swings 180°. Red baked enamel finish.

P/N	RACK HOSE	SJ HOSE	DJ HOSE	HOSE DIA	L	H	W
FHR	100'	75'	—	1½"	23½"	18"	6½"
FHR24	150'	100'	—	1½"	29"	24"	6¼"

P/N	DESCRIPTION
FHR	18" Economy Hose Reel
FHR24	24" Economy Hose Reel

Offering some serious storage for your fire hose, **Brooks'** **HEAVY-DUTY HOSE REELS** feature solid 16-gauge steel sides and hubs. The mounting hardware is tough, too, featuring a welded steel 1" x ¾" reel bracket with a 1½" x ¼" steel wall bracket for impressive support. The wall bracket swings 180° and easily adapts to pipes (1½"-3") with optional pipe bracket set **PBSET**. Each reel comes with a hook-and-loop back strap to keep hose securely wound. Red baked enamel finish.

P/N	RACK HOSE	SJ HOSE	DJ HOSE	HOSE DIA	L	H	W
HDR19	100'	75'	50'	1½"	23¾"	19"	5¾"
HDR25	150'	100'	75'	1½"	30"	25"	5¾"
HDR25HC	300'	200'	150'	1½"	30"	25"	8¾"
HDR25HC	150'	100'	75'	2½"	30"	25"	8¾"

P/N	DESCRIPTION
HDR19	19" Heavy-Duty Hose Reel
HDR25	25" Heavy-Duty Hose Reel
HDR25HC	25" High-Capacity, Heavy-Duty Hose Reel

P/N	DESCRIPTION
PBSET	Pipe Brackets for Heavy-Duty Reels, Pkg/2
VBSR	Red Velcro Strap

Increase the service life of your hose with our red enameled steel **HUMP RACKS**. They provide easy, stress-free fire hose storage by supporting the hose weight at its center, relieving strain on the folded ends and couplings.

P/N	RACK HOSE	SJ HOSE	DJ HOSE	HOSE DIA	L	H	W
HHR1	200'	100'	75'	1½"	33½"	27⅞"	4¾"
HHR2	200'	100'	75'	2½"	33½"	27⅞"	5⅓"

P/N	DESCRIPTION
HHR1	Hump Rack for 1½" Hose
HHR2	Hump Rack for 2½" Hose



FHR



HDR19



HHR1



3 FIRE HOSE, NOZZLES, BRASS, & HOSE VALVES



RC25



RC25LS




HRC1



FHRC18



HH1



STW



W570



W580



W575



K48



AFS



RQR



RST1

Brooks' RACK COVERS are made of durable vinyl to protect your hose rack assemblies from dirt and grime. They're highly visible and that helps discourage tampering. Hook-and-loop closures ensure a proper fit and easy access in an emergency.

P/N	DESCRIPTION	L X H X W
RC25	Cover for Pin Rack, Red	21" x 24" x 5"
RC25S	Cover for Pin Rack, Orange, Spanish	21" x 24" x 5"
RC25L	Cover for Pin Rack, Red	21" x 30" x 5"
RC25LS	Cover for Pin Rack, Orange, Spanish	25" x 24" x 5"
RC32	Cover for Pin Rack, Red	25" x 24" x 5"
HRC1	Cover for HHR1 Hump Rack, Red	34" x 28 ¹ / ₂ " x 5"
HRC2	Cover for HHR2 Hump Rack, Red	34" x 28 ¹ / ₂ " x 6 ¹ / ₄ "

Brooks' REEL COVERS are manufactured to the same standards as our rack covers, offering a custom fit for both our **Economy** and **Heavy-Duty Hose Reels**. These durable vinyl covers are a must for protecting a hose reel investment. Red.

P/N	DESCRIPTION
FHRC18	Cover for FHR & HDR19 Hose Reels, 20"L x 19"H x 5"W
FHRC24	Cover for FHR24 & HDR25 Hose Reels, 26"L x 25"H x 5"W
FHRC24DW	Cover for HDR25HC Hose Reel, 26"L x 25"H x 8"W

MUNICIPAL HAND TOOLS

Our **HOSE HOOK** is a multi-purpose tool that carries hose rolls (up to 5" in diameter) and pulls double duty as a wrench for pin and rocker lugs (up to 2¹/₂") as well as 4" and 5" storz fittings. It also opens foam bucket lids, drains hose, and holds doors open. It comes with a mounting bracket to help keep it handy too.

P/N	DESCRIPTION
HH1	Hose Hook

Designed for today's fire department connections, this assortment of quality **WRENCHES** cover all the popular sizes and styles in storz and threaded adapters (pin or rocker lugs).

P/N	DESCRIPTION
STW	Storz x Universal Spanner (Alum) Fits 4"-6" Storz & 1 ¹ / ₂ "-3" Rocker Lugs
STH	Storz Spanner Wrench Holder
W570	Universal Spanner Wrench (Alum) Fits 1 ¹ / ₂ "-3" Pin/Rocker Lugs
W580	Standard Hydrant/Spanner Wrench (Steel/Ductile Iron) Fits 1 ¹ / ₂ "-6" Pin/Rocker Lugs
W575	Heavy-Duty Hydrant/Spanner Wrench (Steel/Ductile Iron) Fits 1 ¹ / ₂ "-6" Pin/Rocker Lugs
K48	Hydrant/Spanner Wrench Holder (Holder Only)
AFS	Folding Pocket Spanner Wrench (Plastic) Fits Pin/Rocker Lugs Thru 4"

This collection of **MULTI-PURPOSE RESCUE TOOLS** features the **Res-Q-Rench** that's five tools in one—universal spanner, pry tool, window punch, seat belt cutter, and gas shutoff. The small but effective **Res-Q-Me** tool easily shatters tempered glass and cuts through safety belts in seconds. A must-have for service techs and first responders alike.


P/N	DESCRIPTION
RQR	Res-Q-Rench Fits 4", 5" Storz & Rocker Lugs thru 3"
RST1	Res-Q-Me Tool



FIRE AXES and **ACCESSORIES** include some of the finest emergency entry tools available today. The discriminating professional has a choice of four different axes—with or without pick heads (all with 6 lb heads) and either solid hickory or yellow fiberglass handles. Optional mounting bracket and hooks sold separately.

P/N	DESCRIPTION
406M*	Pick Head Fire Axe w/ 36" Hickory Handle
406Y	Pick Head Fire Axe w/ 30 ³ / ₄ " Fiberglass Handle
407Y	Flat Head Fire Axe w/ 34" Fiberglass Handle
→ D406M	Pick Head Fire Axe w/ 36" Hickory Handle (Domestic)
→ D406Y	Pick Head Fire Axe w/ 30 ³ / ₄ " Fiberglass Handle (Domestic)
→ D407Y	Flat Head Fire Axe w/ 34" Fiberglass Handle (Domestic)
AB408	Axe Bracket & Hook

*ACTUAL ITEM MAY DIFFER.

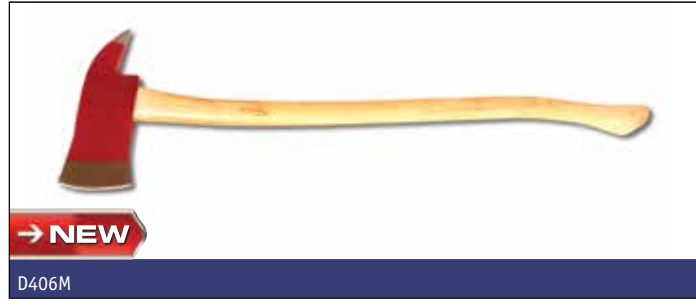

ADAPTERS, CAPS, AND PLUGS

Female x Male BRASS HEXAGON ADAPTERS are used to change threads. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
711	1 ¹ / ₂ " PCT(F) x 1 ¹ / ₂ " NST(M)
712	1 ¹ / ₂ " NPT(F) x 1 ¹ / ₂ " NST(M)
713	1 ¹ / ₂ " NST(F) x 1 ¹ / ₂ " NPT(M)
714	1 ¹ / ₂ " NPSH(F) x 1 ¹ / ₂ " NST(M)
715	2 ¹ / ₂ " NPT(F) x 2 ¹ / ₂ " NST(M)
716	2 ¹ / ₂ " NST(F) x 2 ¹ / ₂ " NPT(M)

Female x Male BRASS REDUCERS are used to change threads or size. Pin lug design in cast brass.

P/N	DESCRIPTION
721	2 ¹ / ₂ " NST(F) x 1 ¹ / ₂ " NST(M)
722	2 ¹ / ₂ " NPSH(F) x 1 ¹ / ₂ " NST(M)
724	2 ¹ / ₂ " NST(F) x 3/4" GHT(M)
725	2 ¹ / ₂ " NST(F) x 1 ¹ / ₂ " NPSH(M)
726	1 ¹ / ₂ " NST(F) x 3/4" GHT(M)
727	1 ¹ / ₂ " NST(F) x 1" NST(M)

Male x Male BRASS HEXAGON NIPPLES are used to change configuration, threads, or size. Rigid hexagon design in brass.

P/N	DESCRIPTION
731	1 ¹ / ₂ " NPT(M) x 1 ¹ / ₂ " NST(M)
732	2 ¹ / ₂ " NPT(M) x 2 ¹ / ₂ " NST(M)
B732	2 ¹ / ₂ " NPT(M) x 2 ¹ / ₂ " NST(M)
733	2 ¹ / ₂ " NPT(M) x 1 ¹ / ₂ " NST(M)

Female x Female BRASS DOUBLE SWIVEL ADAPTERS are used to connect two male hose threads. Dual pin lug swivel design in cast brass. Made in the US.

P/N	DESCRIPTION
B741	1 ¹ / ₂ " NST(F) x 1 ¹ / ₂ " NST(F)
B742	2 ¹ / ₂ " NST(F) x 2 ¹ / ₂ " NST(F)

Female x Male BRASS HEXAGON BUSHINGS are used to change threads or size. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
751	2" NPT(F) x 2 ¹ / ₂ " NST(M)
752	1 ¹ / ₂ " NST(F) x 2 ¹ / ₂ " NST(M)
753	1 ¹ / ₂ " NST(F) x 2 ¹ / ₂ " NPT(M)





761

Female x Female BRASS HEXAGON ADAPTERS are used to change threads or connect two males. Rigid hexagon design in cast brass.

P/N	DESCRIPTION
761	2 1/2" NST(F) x 2 1/2" NPT(F)
762	1 1/2" NST(F) x 1 1/2" NPT(F)
763	1 1/2" NST(F) x 1 1/2" NST(F)



811PB

Female x Female BRASS SNOOTS are used to connect to flush inlet connections. Rigid hexagon design with pin lug swivel in cast, polished, or chrome-plated brass.

P/N	DESCRIPTION
811	2 1/2" NPT(F) x 2 1/2" NST(F), Cast
811PB	2 1/2" NPT(F) x 2 1/2" NST(F), Polished
811PC	2 1/2" NPT(F) x 2 1/2" NST(F), Chrome



822

Female x Male BRASS SNOOTS are used to connect to flush hydrant connections. Rigid hexagon design with pin lug swivel in cast brass.

P/N	DESCRIPTION
821	2 1/2" NST(F) x 2 1/2" NPT(M)
822	1 1/2" NST(F) x 1 1/2" NPT(M)



511N

BRASS CAPS & CHAINS are used on fire department connections, hydrants, valves, etc., to hold back water. Pin lug design in cast, polished, or chrome-plated brass.

P/N	DESCRIPTION
511I	1 1/2" NPSH, Cast
511N	1 1/2" NST, Cast
511NPB	1 1/2" NST, Polished
511NPC	1 1/2" NST, Chrome
512N	2 1/2" NST, Cast
B512N	2 1/2" NST, Cast, Domestic
512NPB	2 1/2" NST, Polished
512NPC	2 1/2" NST, Chrome
512NPCRL	2 1/2" NST, Chrome (Rocker Lug)



512N



514N, 513N

BRASS PLUGS & CHAINS are used on fire department inlet connections to keep inlet ports free of debris. Pin lug design in cast, polished, or chrome-plated brass.

P/N	DESCRIPTION
513N	2 1/2" NST, Cast
B513N	2 1/2" NST, Cast, Domestic
513NPB	2 1/2" NST, Polished
513NPC	2 1/2" NST, Chrome
513NPCRL	2 1/2" NST, Chrome (Rocker Lug)
514N	1 1/2" NST, Cast



PLASTIC CAPS & CHAINS are an inexpensive way to protect hydrant threads and a viable replacement for brass caps when theft is an issue. Models **B150** and **B250** thread on, while the **U250** pushes/pulls on and off. Red.

P/N	DESCRIPTION
B150IPT	1 1/2" NPSH
B150NST	1 1/2" NST
B250	2 1/2" NST
U250	2 1/2" Universal
B250G	Gasket for B250

Our **ALUMINUM BREAK CAPS** serve the same function as the brass and plastic caps, but instead of screwing or pushing/pulling on and off, they are easily broken with a hydrant/spanner wrench. Caps attach to inlets courtesy of two eye bolts that slip over pin lugs.

P/N	DESCRIPTION
ABCA	2 1/2", Silver, Pkg/2
ABCR	2 1/2", Red, Pkg/2

The most economical way to protect fire dept. connection inlets is with **PLASTIC BREAK CAPS**. Choose either the **PAC**, which uses an adjustable bar that threads onto any hose thread or the **PBC2**, which uses eye bolts to secure the cap via the inlet's pin lugs. Both fit 2 1/2" inlets and are easily broken with a hydrant/spanner wrench. Red.

P/N	DESCRIPTION
PAC	Adjust-A-Plug
PBC2	Plastic Break Cap w/ Eye Bolts, Pkg/2

HOSE VALVES

These precision-made **GATED WYE LEADER LINE SIAMESE** come with ball valves built into the body so that either lead can be used independently of the other. **Gated Wyes** feature 2 1/2" NST female swivel inlets and 1 1/2" male outlets in two different threads. Other features include a cast brass body, painted red with polished-chrome trim and rocker lug swivels.

NOTE: Not recommended for charged pre-connected hose lines!

P/N	DESCRIPTION	1	2	3+
611	Gated Wye, NST (Outlets)			
611NPSH	Gated Wye, NPSH (Outlets)			

Engineered for trouble-free operation, these **ANGLE HOSE VALVES** are designed for use with hose storage devices and hydrants. Each valve has a 300 lb rating and is UL listed and FM approved. Constructed of cast brass with red or silver handwheels.

P/N	DESCRIPTION	EACH
411	1 1/2" NPT(F) x 1 1/2" NPT(F) Valve, Red	
B411	1 1/2" NPT(F) x 1 1/2" NPT(F) Valve, Silver	
412	2 1/2" NPT(F) x 2 1/2" NPT(F) Valve, Red	
413	1 1/2" NPT(F) x 1 1/2" NST(M) Valve, Red	
B413	1 1/2" NPT(F) x 1 1/2" NST(M) Valve, Silver	
414	2 1/2" NPT(F) x 2 1/2" NST(M) Valve, Red	
B414	2 1/2" NPT(F) x 2 1/2" NST(M) Valve, Silver	
415	1 1/2" NPT(F) x 1 1/2" NPSH(M) Valve, Red	




B150IPT



U250



ABCA



ABCR



ABCR IN-USE



PAC



PBC2



611



411



413





421



423

Some of the finest **PRESSURE REDUCING ANGLE VALVES** you'll find in the industry. Can be adjusted to restrict pressures up to 175 lbs and come with locking pin devices that restrict full opening by untrained personnel. Pin may be removed by fire personnel for unrestricted operation in emergencies. UL listed. Cast brass construction with red handwheels.

P/N	DESCRIPTION	EACH
421	1 1/2" NPT(F) x 1 1/2" NPT(F) Valve	
422	2 1/2" NPT(F) x 2 1/2" NPT(F) Valve	
423	1 1/2" NPT(F) x 1 1/2" NST(M) Valve	
424	2 1/2" NPT(F) x 2 1/2" NST(M) Valve	



433



B433

Heavy-duty **GATE VALVES**, from **Brooks**, are designed for use on pump test headers and dry systems as a fire hose connection. Valves feature a straightway pattern and come with caps and chains. Other features include solid wedge discs with tapered seats and a 300 lb rating. Models **433** and **434** are UL listed and FM approved. Model **B433** is UL listed only. Cast brass construction with red handwheels.

P/N	DESCRIPTION	EACH
433	2 1/2" NPT(F) x 2 1/2" NST(M) Valve	
B433	2 1/2" NPT(F) x 2 1/2" NST(M) Valve, Domestic	
434	3" NPT(F) x 2 1/2" NST(M) Gate Valve, Rising Stem	



443



B443

SINGLE HYDRANT GATE VALVES are used on fire hydrant outlets for a slow and precise control of flow (throttling). Solid brass valves feature metal-to-metal seats and non-rising stems with an aluminum crank handle or red handwheel. They come standard in a straightway pattern and with a 300 lb rating.

P/N	DESCRIPTION	EACH
443	2 1/2" NST(F) x 2 1/2" NST(M) Gate Valve w/ Swivel	
B443	2 1/2" NST(F) x 2 1/2" NST(M) Valve w/ Swivel, Domestic	



REPLACEMENT PARTS

VALVE REPLACEMENT PARTS. Red handwheels fit **Giacomini** valves; silver handwheels fit **Powhatan**.

P/N	DESCRIPTION
PHW15	Handwheel for Powhatan 1 1/2" Valve
PHWN15	Handwheel Nut for Powhatan 1 1/2" Valve
GHW15	Handwheel for Giacomini 1 1/2" Valve
PHW25	Handwheel for Powhatan 2 1/2" Valve
PHWN25	Handwheel Nut for Powhatan 2 1/2" Valve
GHW25	Handwheel for Giacomini 2 1/2" Valve
GHWN	Handwheel Nut for Giacomini Valve
GSRS15	Rubber Seal for Giacomini 1 1/2" Angle Valve
PSRS15	Rubber Seal for Powhatan 1 1/2" Angle Valve
PSRS25	Rubber Seal for Powhatan 2 1/2" Angle Valve

